


USERS AIR AT 5 BAR  
CONSUMPTION 140  
LITRES OF FREE AIR  
AIR PER MINUTE


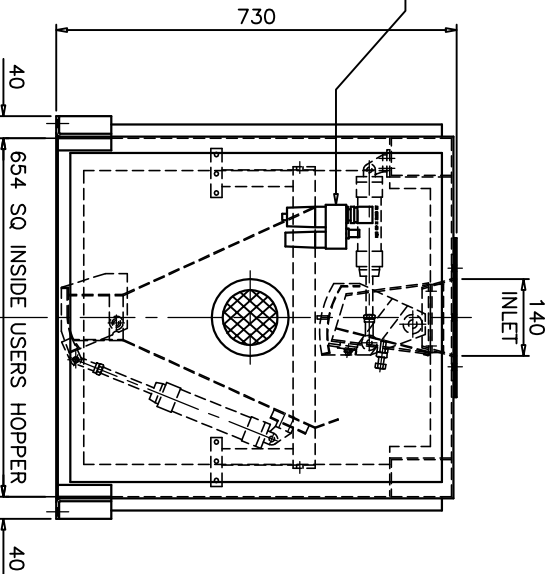


SCALE IS TO BE FED FROM  
USERS HOPPER WHICH SHOULD  
NEVER CONTAIN LESS THAN TWO  
WEIGHTMENTS OTHERWISE SCALE  
ACCURACY WILL BE IMPAIRED

TASCOL SHORE ENG LTD COPYRIGHT ©2002 USERS INSTALLATION RESPONSIBILITIES

ALLOWED TO BE FED FROM THE HOPPER OR FROM AN AUTOMATIC FEEDER. THE FEEDING RATE SHOULD BE 40 TO 60 KG PER HOUR. THE FEEDING RATE SHOULD NOT EXCEED 60 KG PER HOUR. THE FEEDING RATE SHOULD NOT EXCEED 60 KG PER HOUR. THE FEEDING RATE SHOULD NOT EXCEED 60 KG PER HOUR.

USERS CHOKE DETECTION SWITCH WHEN NECESSARY

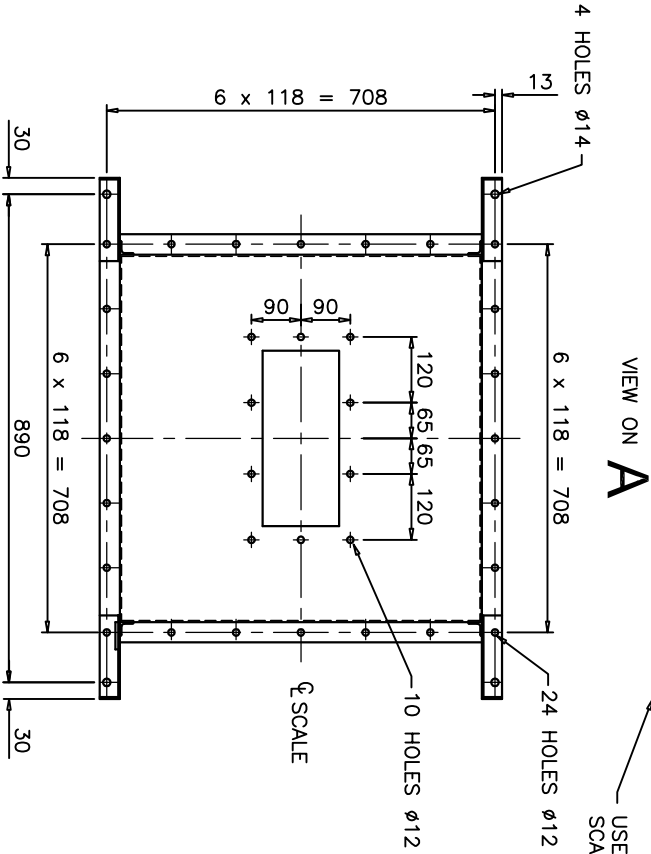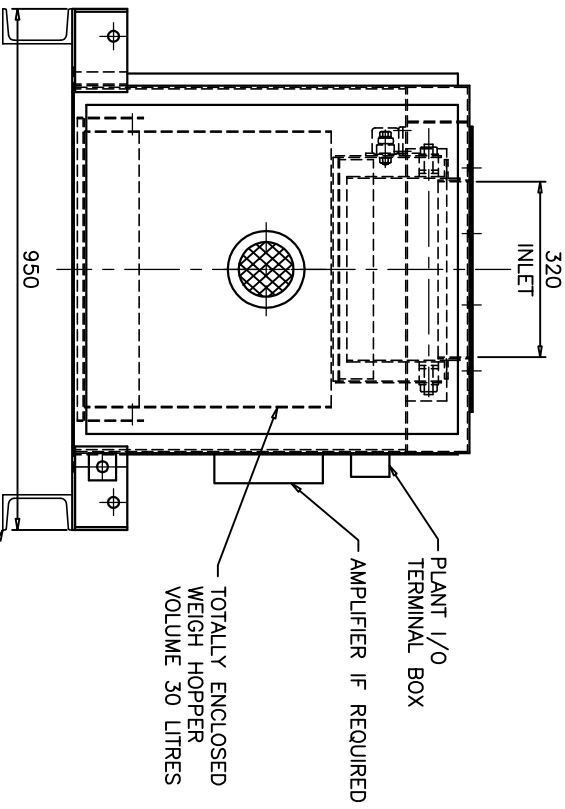

REV	0	TASCOL SHORE ENGINEERING Ltd COPYRIGHT ©2004	THIS DRAWING AND COPIES OF IT ARE THE PROPERTY OF TASCOL SHORE AND MUST NOT BE COPIED OR CIRCULATED TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF TASCOL SHORE ENG LTD
DATE	5/04	CUSTOMER	
NAME	DWFOOD	STANDARD	
		TASCOL SHORE ENGINEERING Ltd	NOTTINGHAM ENGLAND
		Drng. No. M3-0153-157	
		EPS 80 PROCESS SCALE 30 LITRE	SCALE
			1:10
			SHEET 01